


Amended Assembly Instructions

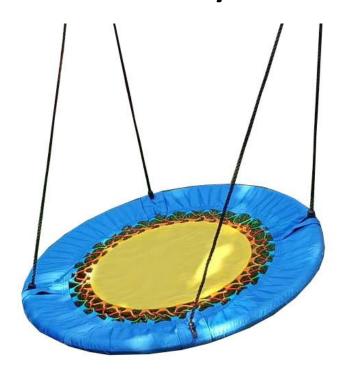

The following are amended steps for 2 different types of ropes. In case you have the instructions for the bolt-type ropes, but have the plastic-end ropes, then you should following the following steps instead.

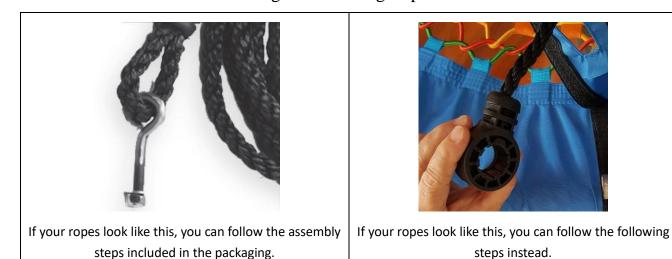

The plastic ends work like this:

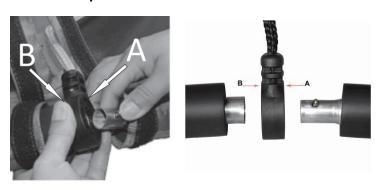

Assembly Steps – For Swing with Plastic End Ropes



Swing arrives in 4 pieces plus
hanging ropes and a mat for assembly.



2. Put the frame tubes and seat mat on the floor. Check which ends of the tubes fit together. Slide them into the sleeves one by 1, but don't connect them.



3. Open the Velcro section, pass the plastic end of the rope through the hole between the Velcro.



4. The plastic end goes over one of the tubes, and then the tubes can be connected and the Velcro closed. Just do 1 section for now, not all 4.



5. On each pair of ropes, 1 is longer and 1 is shorter. So when choosing which plastic end to put on which section of tube, the 2 long ones must be beside each other, not positioned diagonally.



6. To get it into a full circle, you'll want to finish 2 half circles first (with all 4 plastic ends in position). Then as pictured in the above image, get it close to flat, then make it flat.



7. With the circle flat, and all 4 plastic ends in the right positions, it'll look like this.



8. You can change the swing angle by adjusting the 8-hooks on the back ropes. The front of the swing is fixed at 170cm tall.



9. Assembly is finished and ready to swing.